



FIESTA 1001-N-C-S / OPERA 1016-N-C-S WITH CLASSIC 6003

Contents of Fiesta # 1001-N-C-S or Opera # 1016-N-C-S

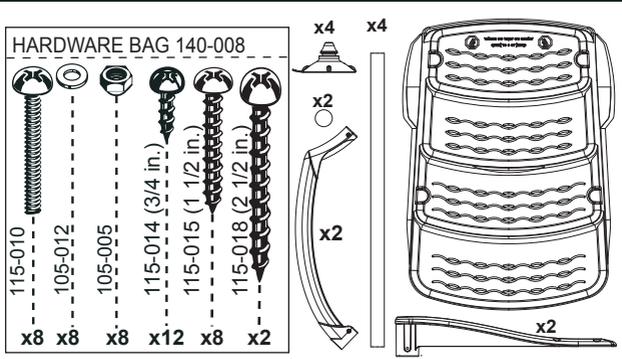

Contents of the ladder box SKU # 6003

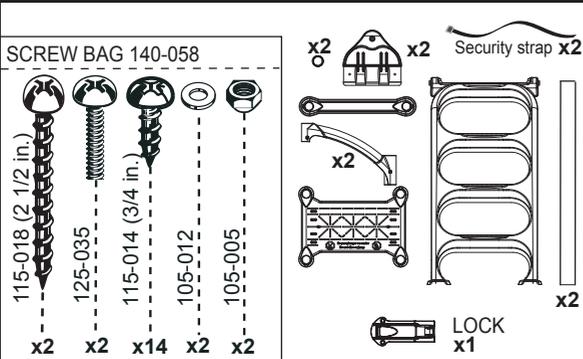

Sand (not included)




! WARNING

- ◆ Do not dive or jump from step or ladder.
- ◆ Use BATTERY operated tools to avoid electric shocks.
- ◆ Install step on flat surface, following the manufacturers instructions.
- ◆ Remove step from pool during freezing climate season.
- ◆ Manufacturer cannot be held responsible for injuries caused by abusive use of product.
- ◆ Ask your city about specific regulations that apply to your above-ground pool and ladder.


Tools Required (not included)

A weather resistant padlock is recommended.

Maximum functional width is 1/4 inch.

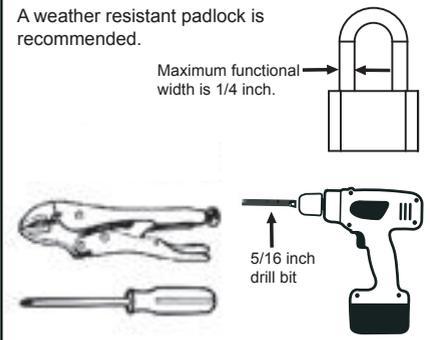


Fiesta - Classic 6003 shown.
Instructions also compatible for Opera - Classic 6003

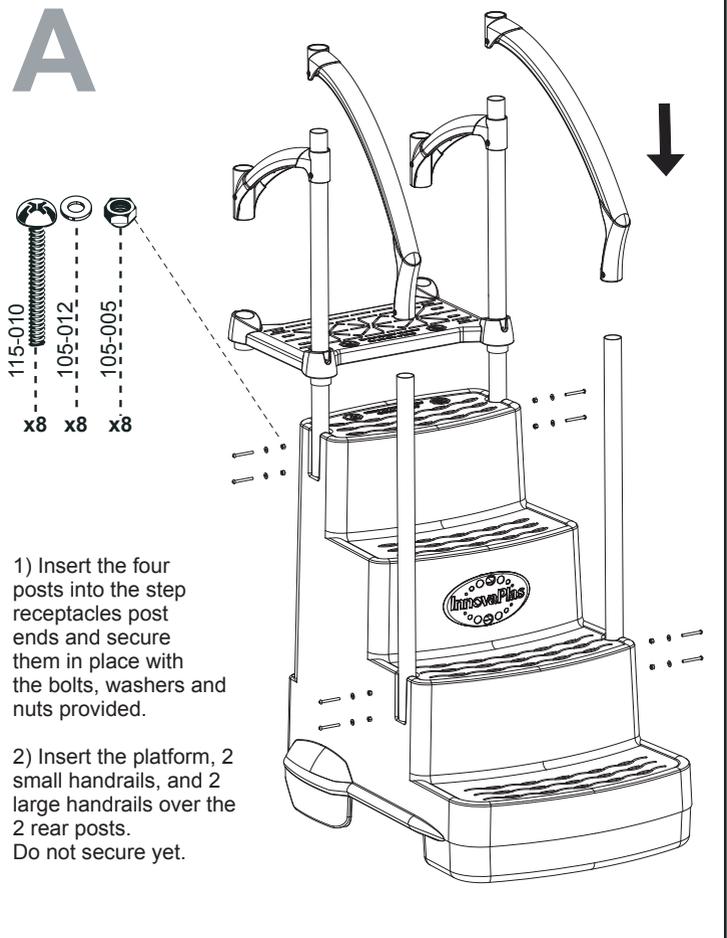

B

Insert the Step Cup™ in the 4 holes under the step.

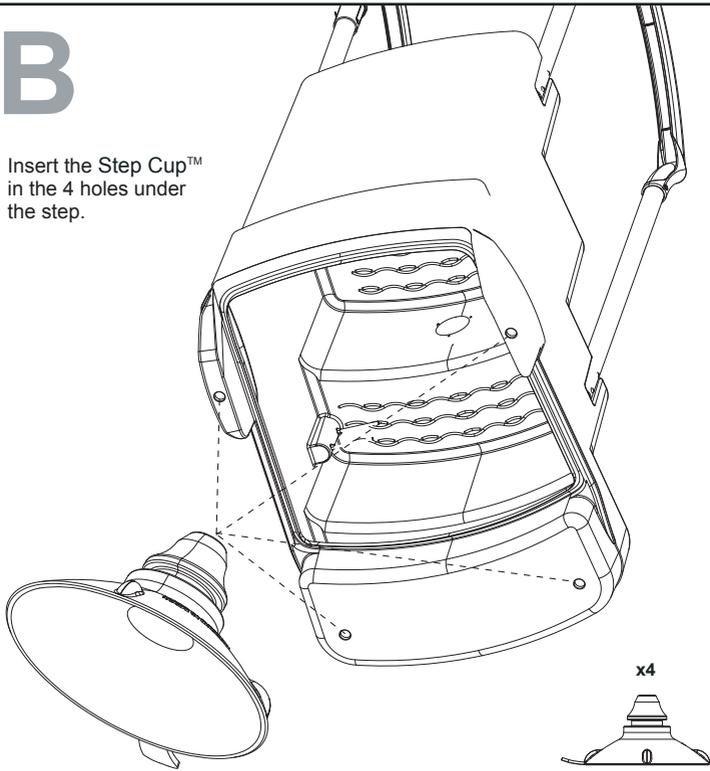

1) Insert half of the Step Cup™ mushroom in the hole, at a 45 degree angle.

2) With a flat screwdriver, compress the Step Cup™ mushroom ring while pushing it into the hole.



3) Twist the Step Cup™ to ensure that its mushroom has entirely cleared the wall thickness. If it has, the suction cup should rotate freely.


CAUTION

Failing to install the Step cup™ will greatly reduce the steadiness of the step and will void the manufacturer warranty.

C

1) Install the four post covers.


2) Secure the handrails to the posts using the screws provided. Do not secure platform.

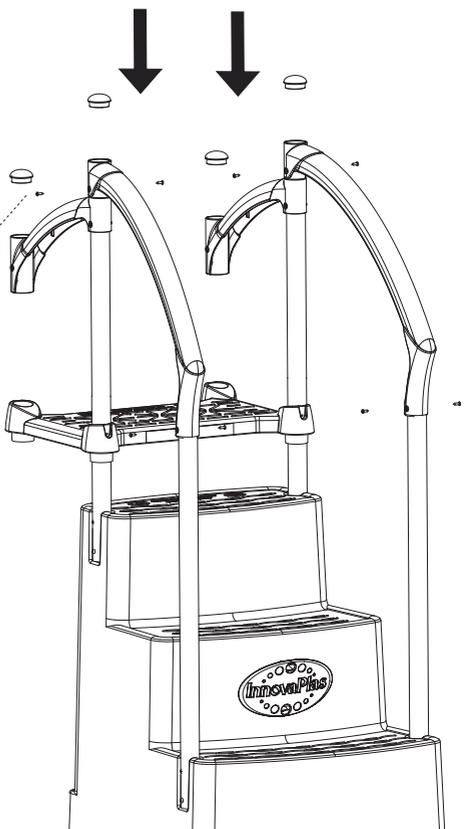

D

1) Insert the sandbag under the first step.

2) Slowly submerge the step in the pool. Make sure you do not damage the liner in the process.

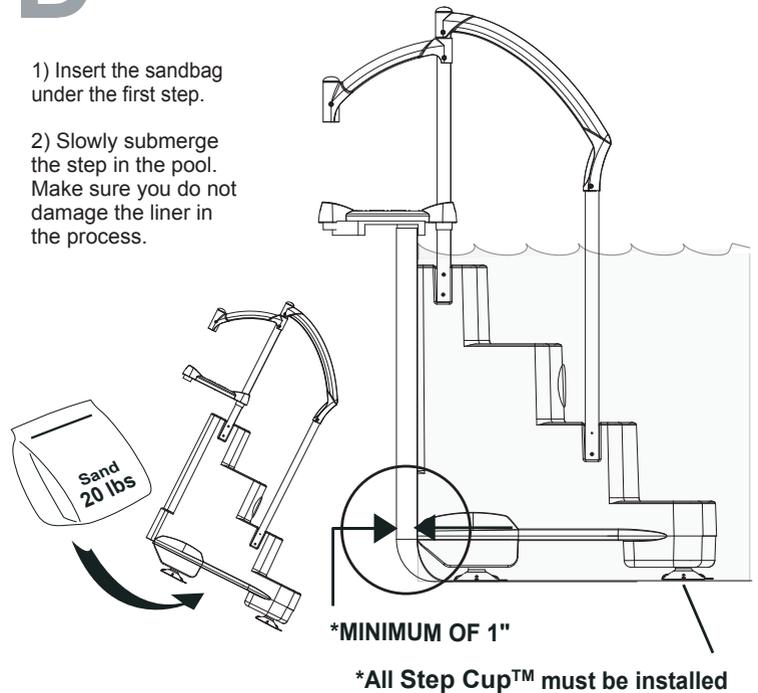


CAUTION*

To prevent a pool liner puncture, install all Step Cup™ as specified and keep a minimum of 1" inch gap between the pool liner and the rear underside of the step.

E

1) Once the step is in the pool secure the platform to the top seat (see illustration) using the two straps provided.

Security strap x2

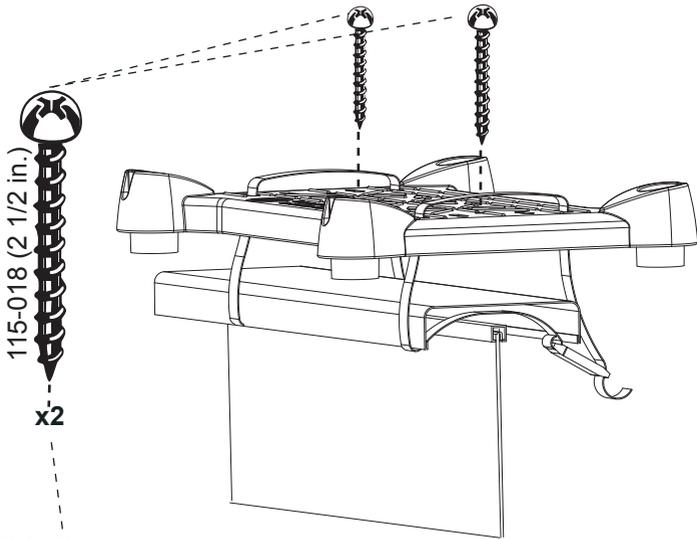

OPTIONAL:

Once the pool step has been completely assembled and secured to the pool, attach the 2 screws supplied through the platform to the top seat of your pool to provide a more rigid assembly.


F

1) Trace a line on each post at 39 inches from the ground for 48" & 52" pools. If you have a 54" pool, trace a line at 40.5" from the ground.


2) Slide the pivot blocks onto the posts and line up with the traced marks. Secure with the screws provided.

3) Slide the 2 posts through the platform and handrails and slide the lock in place.

4) Secure the ladder base to the post with the screws provided.

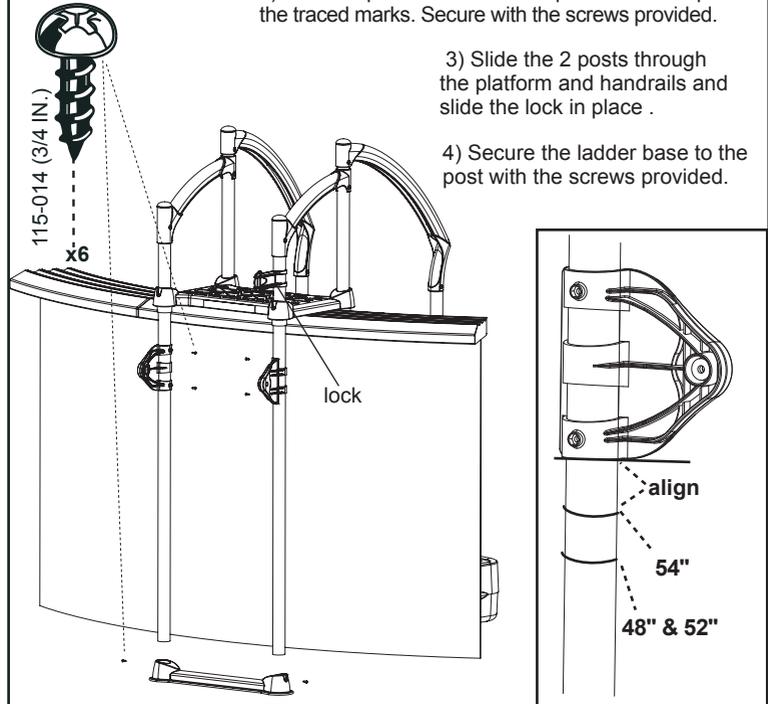

G

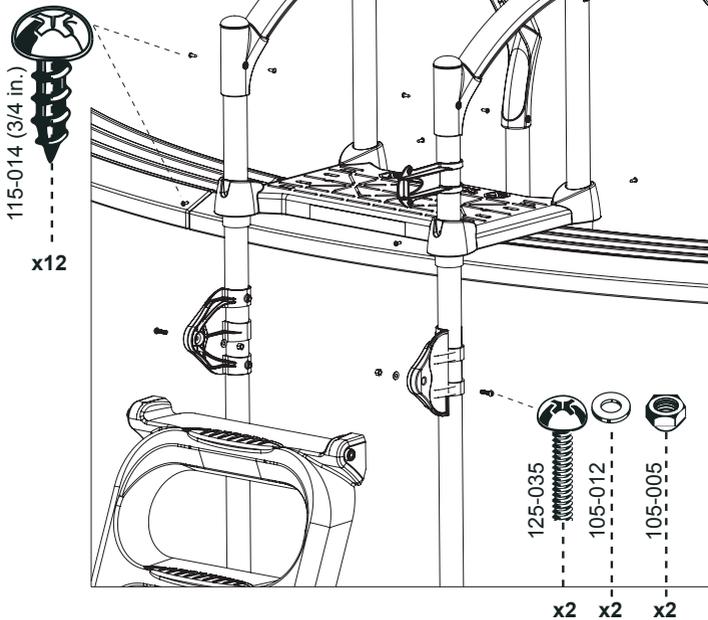


1) Secure the handrails and platform to the posts with the screws provided.

2) Secure the ladder to the pivot blocks using the bolts, washers and nuts provided.

H

Use sliding lock as a guide to drill hole into ladder in up position. Use a 5/16" drill bit. ****PADLOCK REQUIRED****

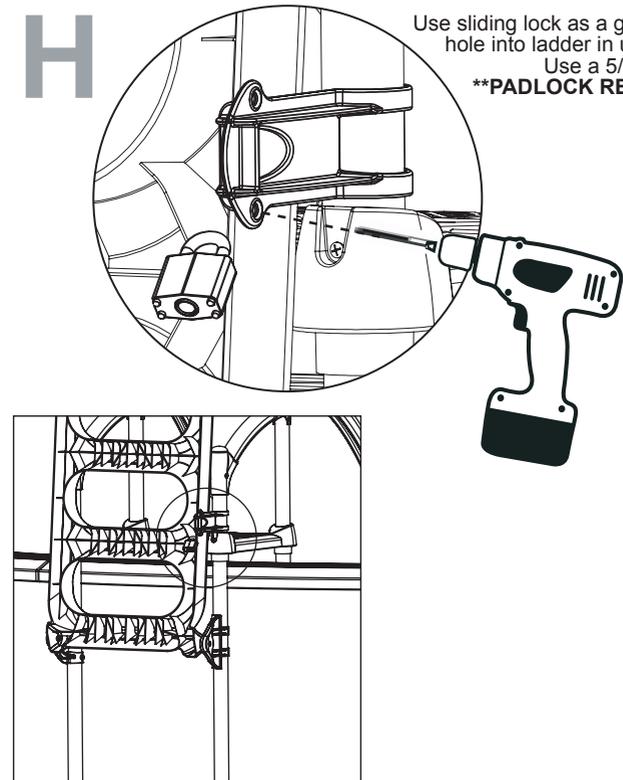

⚠ WARNING

SWING THE LADDER UP AND LOCK IN PLACE WHEN THE POOL IS NOT IN USE TO PREVENT DROWNING AND UNAUTHORIZED ENTRY.

